


SAC-M12T/2XM12 PB DP

Order No.: 1507780

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1507780>Bus system T-connector, 5-pos., PROFIBUS, M12 plug, B-coded, to
M12 plug, B-coded, and M12 socket, B-coded

CANopen

Commercial data

GTIN (EAN)	 4 017918 900380
sales group	D116
Pack	1 pcs.
Customs tariff	85366990
Catalog page information	Page 296 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/15/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	5
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 1 GΩ

General characteristics

Coding	B - inverse
Surge voltage category	II
Pollution degree	3
Degree of protection	IP68
Insertion/withdrawal cycles	≥ 100
Contact material	Cu alloy
Contact surface material	Ni/Au
Contact carrier material	PUR
Material of grip body	PUR
Material, knurls	Nickel-plated brass
Sealing material	Viton
Status display	No
Test voltage	1500 V


Diagrams/Drawings

Dimensioned drawing

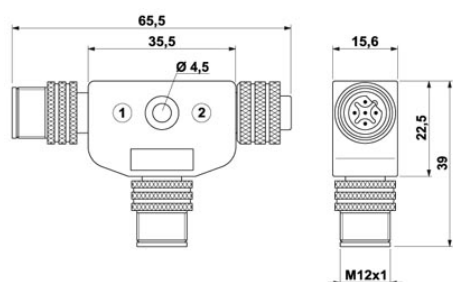


M12 T distributor

Circuit diagram

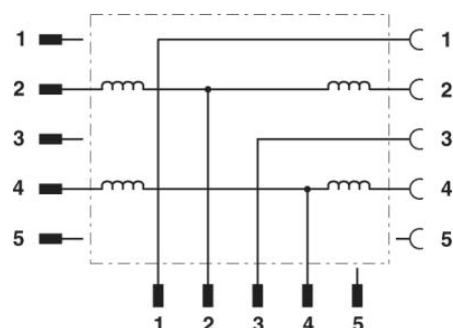


Contact assignment of the M12 plug and the M12 socket

Schematic diagram

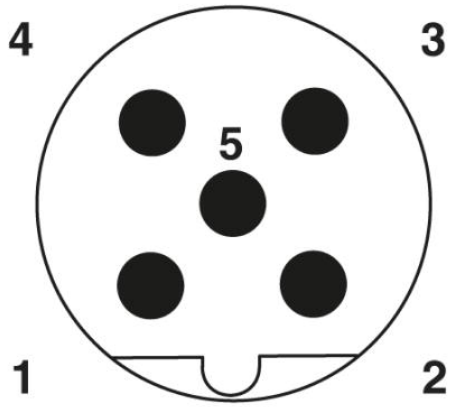

Pin assignment M12 male connector, 5-pos., B-coded, male side

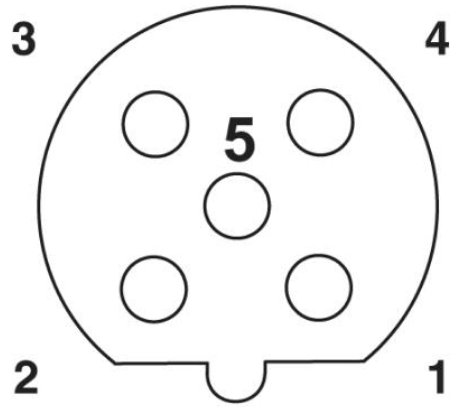

Pin assignment M12 female connector, 5-pos., B-coded, female side

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;