



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

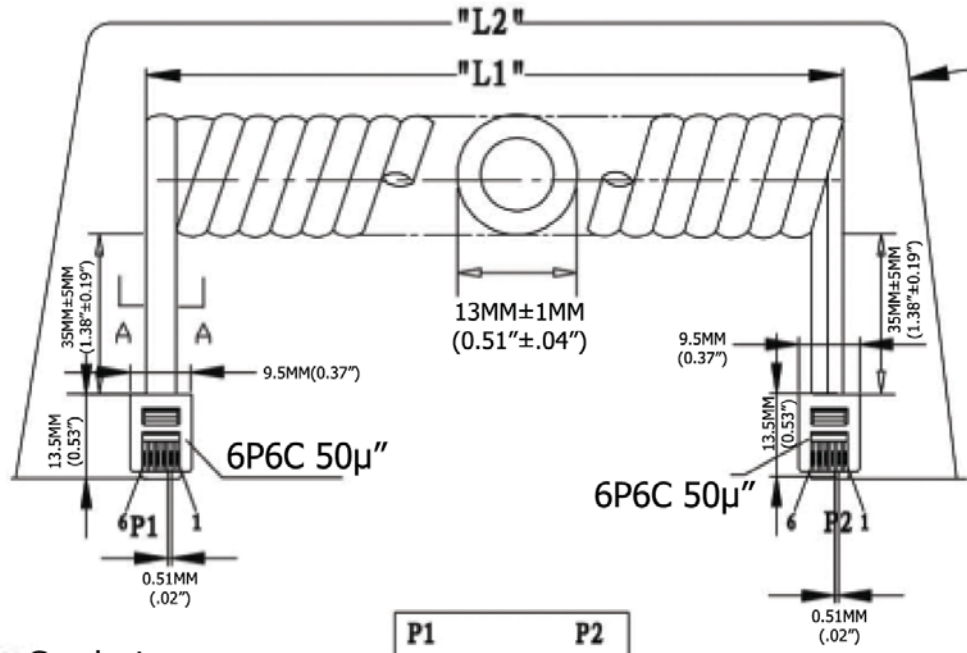

Extended length is with 500g of force

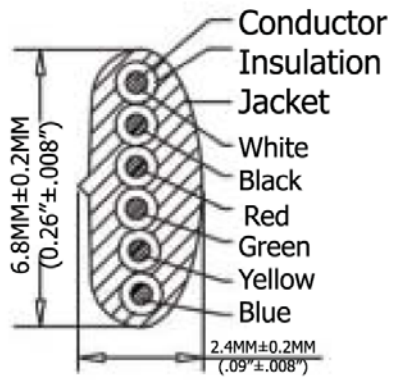

P1		P2
1	WHITE	1
2	BLACK	2
3	RED	3
4	GREEN	4
5	YELLOW	5
6	BLUE	6

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	134.0 Inches
7,620.0MM-8,763.0MM	3,403.6MM

- Material:**
- Plug Housing: Polycarbonate, clear
 - Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
 - Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
 - Conductor(X6C): 26AWG (0.12X12) Bare Copper
 - Insulation(X6C): PP6331 ID 0.95-1.0
 - Jacke: PVC No UL 80 P
 - Package: Individual PE Bag

SEC: A-A

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	11.02.11	AT-C-26-6/6/B-25/R
X.X	±0.40				Approved		
X.XX	±0.25						Title
X.XXX	±0.15						NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Reverse Plug, 50µ" of contact plating, BLACK
Angle	±3°						Drawing No.
							rev00
							Replace
							Sheet

