


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

ITEM	QTY	PART NO.	DESCRIPTION
1	3	CA21689A01	RING, RETAINING
2	1	CA21688A01	SPRING, HANDLE RETURN
3	5	CA21492A01	CLIP, E
4	1	CA21687A01	SCR, HSBHC • M3
5	1	CA21686A01	PRELOAD ADJUSTING STAR
6	1	CA21685A01	PIN, RETAINING PAWL SPR.
7	1	CA21684A01	PIN, PIVOT PAWL
8	1	CA21683A01	PAWL
9	1	CA21491A01	SPRING, PAWL
10	1	CA21493B01	SET, HANDLE (UPP./LWR)
11	2	CA32115A01	SCR, HSBHC • M4 X 14

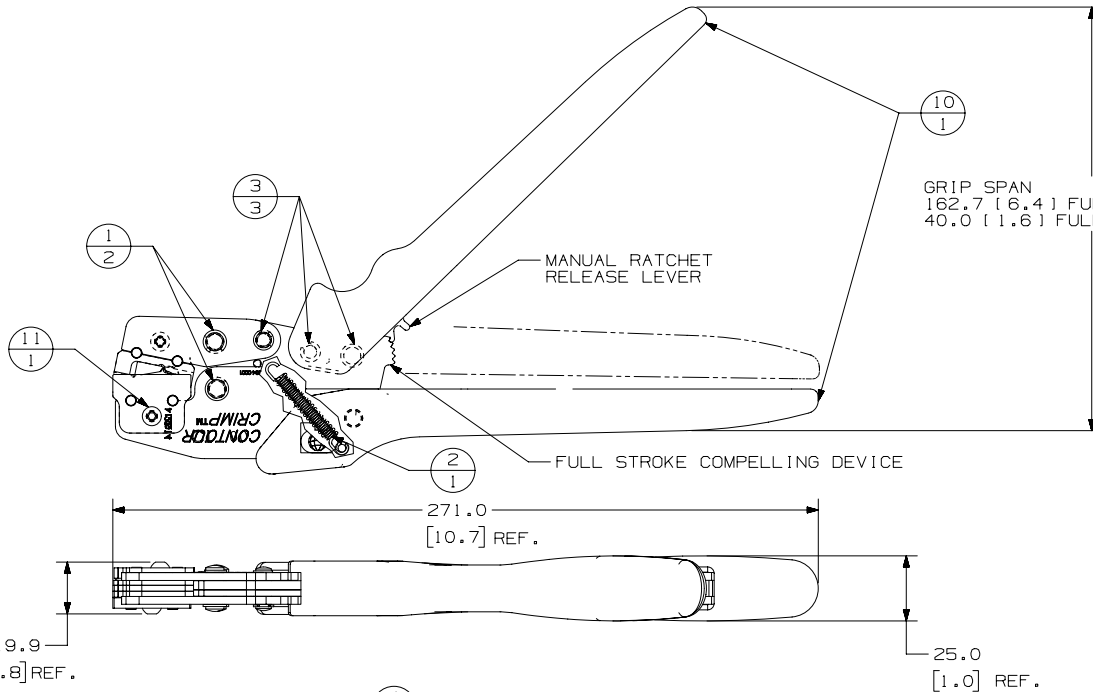

NOTES, UNLESS OTHERWISE SPECIFIED:

TOOL WEIGHT: 1.41 lbs/0.64 Kg


ALL DIMENSIONS IN METRIC (mm)  
[ ] DIMENSIONS IN INCHES

HANDLE TO SPRING RETURN FREELY TO OPEN POSITION AFTER CRIMPING

TOOL FRAME MEMBERS AND FASTENERS TO BE BLACK OXIDE FINISH.

RECOMMENDED LUBE FOR FRAME LINKAGE:  
MOLYKOTE BR2 PLUS. (SUPPLIER: DOW CORNING)

THE CRIMP POCKET INSPECTION INFORMATION IS LISTED IN THE OPERATING INSTRUCTIONS. THE OPERATING INSTRUCTIONS CAN BE FOUND ON THE WEB, GO TO WWW.PANDUIT.COM AND SEARCH FOR "TERMINAL LOOSE PIECE OPERATION MANUALS".

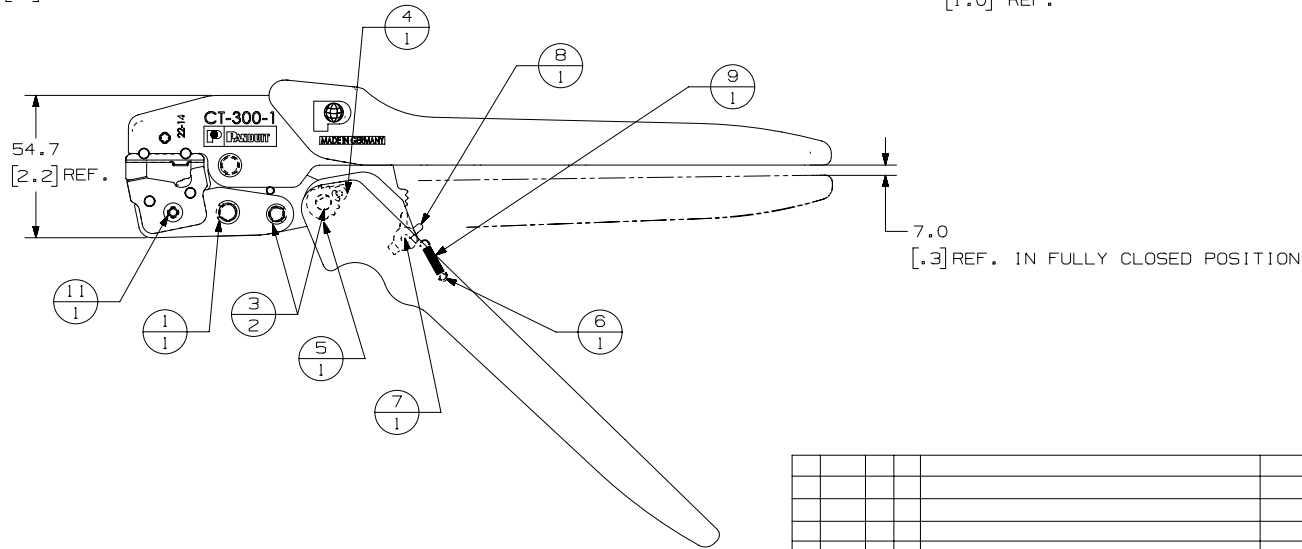

										CD FILENAME/LAYERS R24939BA_DS_TP24939C01_00A		
										<b>PANDUIT</b> CORP TINLEY PARK, ILLINOIS		
										CD*CT-300-1		
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.XX) ± .01 (XXX) ± .02 ANGLES ± .01		
										UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION		
										DRWN BY DCS	MAT'L L1	
										DATE 04-06-05	SCALE 3/4	
										DRWG NO. TP24939C01	DWG SIZE C	
00	04-06-05	DCS	MBR	RELEASED				4159	--	BKA	CHW	MBR
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP				