


REVISIONS			DATE	APPROVED
ZONE	LTR	DESCRIPTION	1/24/80	<i>Blair</i>
	C	CHANGE PER DCO 01075		

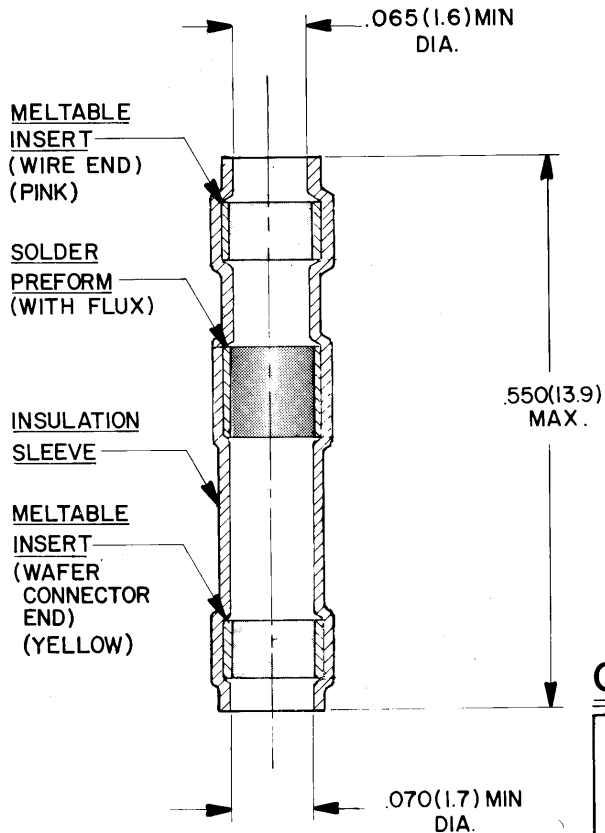

NOTES :

1. MATERIALS

- I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- I-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.
- I-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAUGE TIN PLATED OR SILVER PLATED CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE: .XXX: ± (M. M.) .XX: ± (M. M.) Δ: ±	DRAWN	SA. LOPEZ	5-7-79	Raychem <small>RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025</small>
	CHECKED	<i>Ph</i>		
	APPROVED	<i>Blair</i>	5-7-79	TITLE
	APPROVED	<i>E. Steiner</i>	5-7-79	SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING 150°C(Sb5)MTC100 SERIES
	APPROVED	<i>Steiner</i>	5-7-79	SIZE
			B	CODE IDENT
				NO. 06090
				DWG. NO.
				CTA-0025
				WEIGHT
				SHEET 1 OF 1
	PROJECT	6448-7055		

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING