

### FEATURES AND BENEFITS

2.2" x 4.16" x 1.5" Package (Standard)	Universal Input 90-305Vac
Single output	UL8750
EN55015(EN55032) Class B Conducted EMI	0.5W power consumption at no-load
225 Watts (Fan Cooled, 200 LFM)	Active inrush current limiter – 15A
180 Watts (Conduction Cooled)	Meets IEC61000-3-2 Class C for 0% to 100% LED Dimming Applications (1Watt input power to full load)
140 Watts (Convection Cooled)	

### MODEL SELECTION

Model Number*	Volts	Output Current w/200LFM air	Output Current Conduction	Ripple & Noise <sup>1</sup>	Total Regulation	OVP Threshold
LU225S12K	12V	18.5A	13.3A	1%	±2%	14.1 ± 1.0V
LU225S24K	24V	9.38A	7.08A	1%	±2%	27.6 ± 1.0V
LU225S36K	36V	6.25A	4.72A	1%	±2%	39.8 ± 1.0V
LU225S48K	48V	4.69A	3.75A	1%	±2%	55.2 ± 2.0V
LU225S56K	56V	4.00A	3.2A	1%	±2%	64.3 ± 2.0V

\*Replace K in the model number with KL for top mount Version. Example: LU225S56KL.

### INPUT

AC Input	100-277Vac, ±10%, 47-63Hz, 1 $\phi$		
Input Current	Max. 115Vac: A, 277Vac: 1.3A		
Inrush Current	< 15A peak, 277Vac, cold start, turn on at AC zero crossing		
Input Fuse	provided on all models		
Earth Leakage Current	<500 $\mu$ A@277Vac, 60Hz, NC		
Efficiency	VIN (Vac)	12V & 24V	48V & 56V
		88%	90%
		90%	92%

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

### ISOLATION SPECIFICATIONS

Isolation	Input-Output: 3,000Vac Input-Ground: 1,800Vac Output-Ground: 1,500Vac
-----------	---

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

### OUTPUT

Hold - up Time	12 mSec min, 115Vac/60Hz
Turn On Time	Less than 1 sec. @115Vac, Full Load
Switching Frequency	PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load
Output Power	225 Watts max. with 200 LFM
Output Voltage	See model chart
Ripple and Noise	0.5%rms, 1% pk-pk, see chart
Transient Response	For 5% to 50% or 50% to 5% load change: <20 mSec, return to 1% of nominal, $\Delta i/\Delta t$ <0.2A/uS Max voltage deviation=3%
	For 50% to 100% or 100% to 50% load change: <1 mSec, return to 1% of nominal, $\Delta i/\Delta t$ <0.2A/uS Max voltage deviation=3%
	For 5% to 100% or 100% to 5% load change: 25 mSec, return to 1% of nominal, $\Delta i/\Delta t$ <0.2A/uS Max voltage deviation=4%
Voltage Adjustability	Fixed Output
Minimum Load	Not required
Total Regulation	+/- 3% combined line, load and initial setting

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.



### EMI/EMC COMPLIANCE

Conducted Emissions	EN55015 (EN55032) Class B, FCC Part 15, Subpart B, Class B
Radiated Emissions	EN55022 (EN55032) Class A, FCC Part 15, Subpart B, Class A with 8dB Margin. Addition of cores on external wiring will help the system pass class B (Application notes are available)
Static Discharge Immunity	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV common-mode
Conducted RF Immunity	EN61000-4-6, 3Vrms
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m
Voltage Dip Immunity	EN61000-4-11, 100%, 10ms; 30%, 500ms; 60%, 100ms; Performance Criteria A, A, & A at 58% load
Line Harmonic Emissions	EN61000-3-2, Class A, D For Class C from 1W input power to full load by 10% increment
Flicker Test	EN61000-3-3, Complies (dmax<6%)

### RELIABILITY

MTBF	438,540 hours. Conditions: Standard: Telcordia SR-332 issue 3 Ambient temp: 25c Voltage: 110v Level: 0/1 Environment: Ground, fixed, controlled
Life	Standard W:2.2 x L: 4.1" x H:1.5" "L" option: W:2.2"x L:4.81" xH:1.5"

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

### PROTECTION

Overtemperature Protection	Sensing transformer temperature, 165°C latching type, requires input power recycling to reset
Overload Protection	Hiccup Mode
Short Circuit Protection	Hiccup Mode, auto recovery. A direct hard short may latch off the converter; remove AC input to reset
Overvoltage Protection	OVP latch, remove AC input to reset

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

### ENVIRONMENT

Operating Temperature	-10°C to +70°C (See Below Chart) Start Up at -40°C
Heat - Sink Temperature	To maintain Safety approval & life expectancy, heat-sink temperature should not exceed 85°C
Storage Temperature	-40°C to +85°C
Altitude	Operating: -457 to 3000 m Non-operating: -457 to 12,192m
Relative Humidity	5% to 95%, non-condensing
Vibration	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 1 hr/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 10 min/axis
Dimension	Standard W:2.2 x L: 4.1" x H:1.5" "L" option: W:2.2"x L:4.81" x H:1.5"
Weight	370g "H" option: TBD

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

### SAFETY

Safety Standards	EN/CSA/UL/IEC 60950-1, 2nd Edition & UL 8750
Shock	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3axes, 6 shocks total

The specification above is based on 25°C ambient and where applicable at nominal input voltage of 100 to 277VAC.

Ambient	Cooling Method	Wattage (watts Max.)
50°C	Forced Air, 200 LFM	225
60°C	Forced Air, 200 LFM	190
70°C	Forced Air, 200 LFM	160
50°C with Max. Temperature of heat-sink to be held under TBD°C	Conduction	180
60°C with Max. Temperature of heat-sink to be held under TBD°C	Conduction	165
50°C	Convection	140



### MECHANICAL DRAWING

#### Standard

38.10±0.50 [1.50±0.02]  
0 [0.00]  
0 [0.00]  
5.11 [0.20]  
100.40 [3.95]  
105.00±0.50 [4.13±0.02]  
6.10 [0.24]  
50.55 [1.99]  
56.23±0.50 [2.21±0.02]

GND NUT (M3x0.5mm)  
PEM F-M3-1 FAR SIDE  
Screw penetration 6.0mm Max.

Screw (M3x0.5) penetration 2.0mm Max.  
(Bottom four feed holes)  
Screw torque 5 lbf.in Max.

**NOTES:** Unless otherwise specified.  
ASSEMBLY AND PARTS ARE RoHS COMPLIANT.  
MAXIMUM SCREW (M3.0x0.5MM) PROTRUSION FROM OUTSIDE SURFACE IS 6.0mm [ 234 INCH].  
MAXIMUM TORQUE IS 0.35 N.M [3 IN.LB].

CONNECTOR INFORMATION			
INPUT (J1)		MATING CONNECTOR Tyco/AMP 640250-3 Terminals: 3-640252-1	CONFIGURATION #1 AC NEUTRA #2 EMPTY #3 AC LINE
	OUTPUT (J3)	MATING CONNECTOR AMP 640250-6 Terminals: 3-640252-1	CONFIGURATION Pin 1) -Vout Pin 2) -Vout Pin 3) -Vout Pin 4) +Vout Pin 5) +Vout Pin 6) +Vout

REV	DATE	DESCRIPTION	BY	CHKD
1		ISSUE FOR MOUNTING		

REV	DATE	DESCRIPTION	BY	CHKD
1		ISSUE FOR MOUNTING		

#### Long Version KL

38.10±0.50 [1.50±0.02]  
0 [0.00]  
0 [0.00]  
4.11 [0.16]  
17.40 [0.68]  
72.20±0.50 [2.84±0.02]  
4x Ø4.30 [0.18]

GND SCREW (M3x0.5mm)

4x PEM NUT F-M3-1 OR PENCORR PE11157 FAR SIDE MATCH THE M3x0.5 SCREW

**NOTES:** Unless otherwise specified.  
ASSEMBLY AND PARTS ARE RoHS COMPLIANT.  
MAXIMUM SCREW (M3.0x0.5MM) PROTRUSION FROM OUTSIDE SURFACE IS 6.0mm [ 234 INCH].  
MAXIMUM TORQUE IS 0.35 N.M [3 IN.LB].


CONNECTOR INFORMATION			
INPUT (J1)		MATING CONNECTOR Tyco/AMP 640250-3 Terminals: 3-640252-1	CONFIGURATION #1 AC NEUTRA #2 EMPTY #3 AC LINE
	OUTPUT (J3)	MATING CONNECTOR AMP 640250-6 Terminals: 3-640252-1	CONFIGURATION Pin 1) -Vout Pin 2) -Vout Pin 3) -Vout Pin 4) +Vout Pin 5) +Vout Pin 6) +Vout

REV	DATE	DESCRIPTION	BY	CHKD
1		ISSUE FOR MOUNTING		


REV	DATE	DESCRIPTION	BY	CHKD
1		ISSUE FOR MOUNTING		




### Efficiency Curve

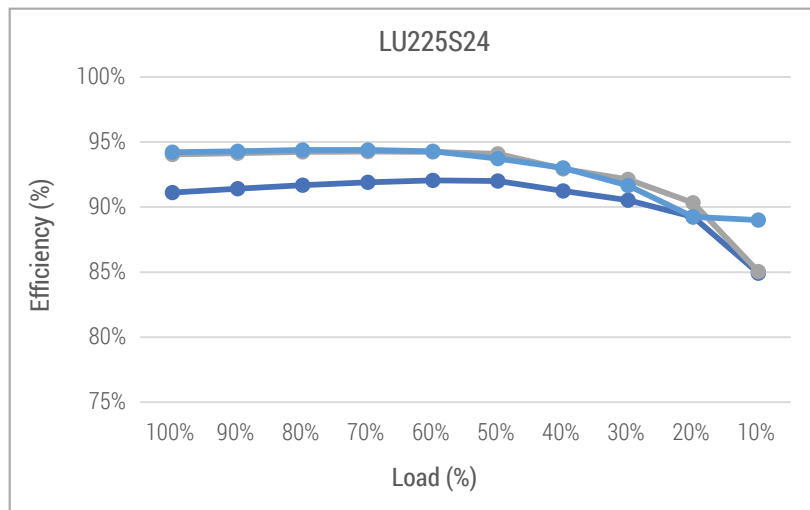

	115Vac
	230Vac
	300Vac

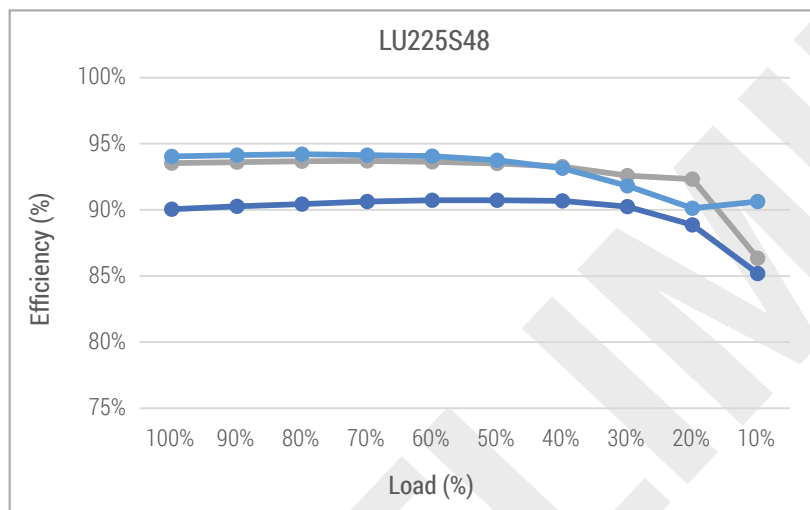


	115Vac
	230Vac
	300Vac

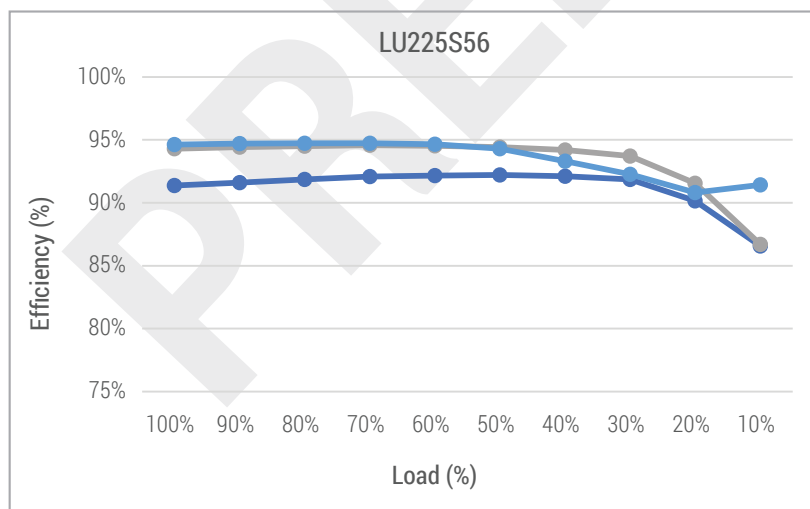


	115Vac
	230Vac
	300Vac




### Power Rating Curve

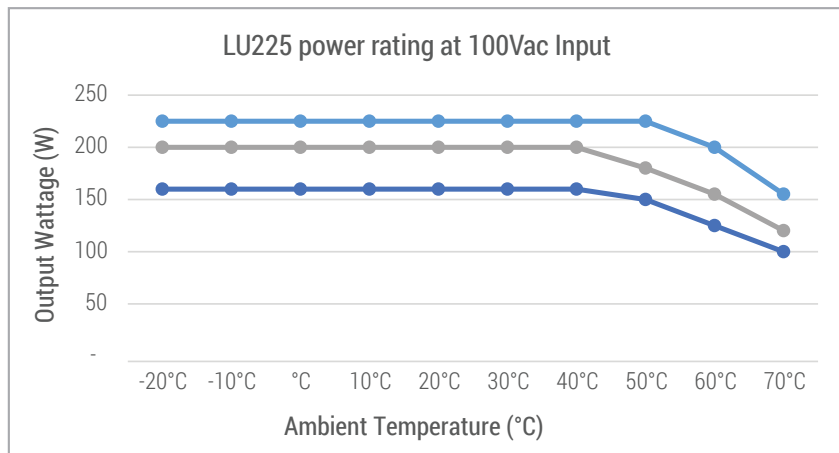

	Convection
	Conduction
	Air Cooling

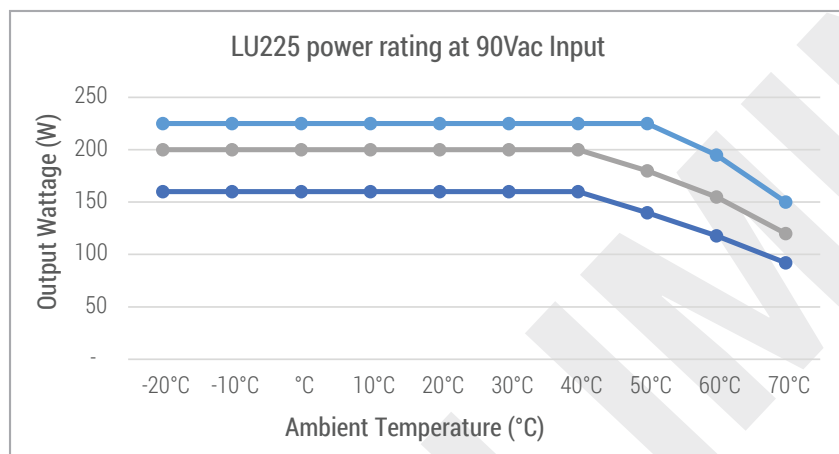

	Convection
	Conduction
	Air Cooling

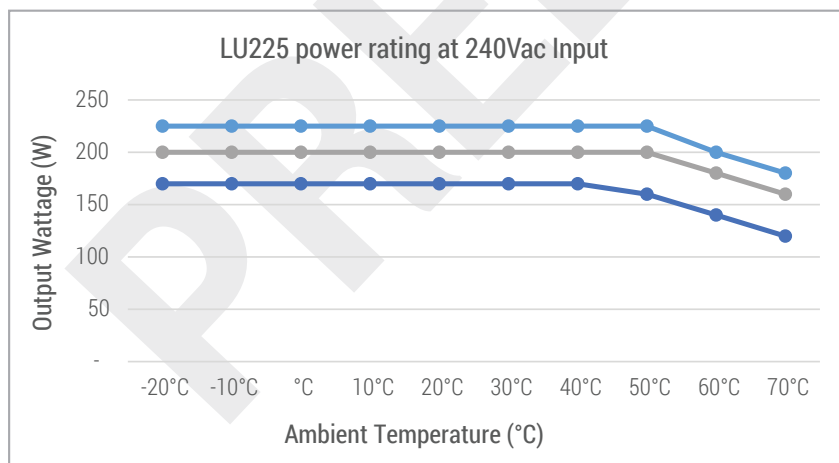

	Convection
	Conduction
	Air Cooling