THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

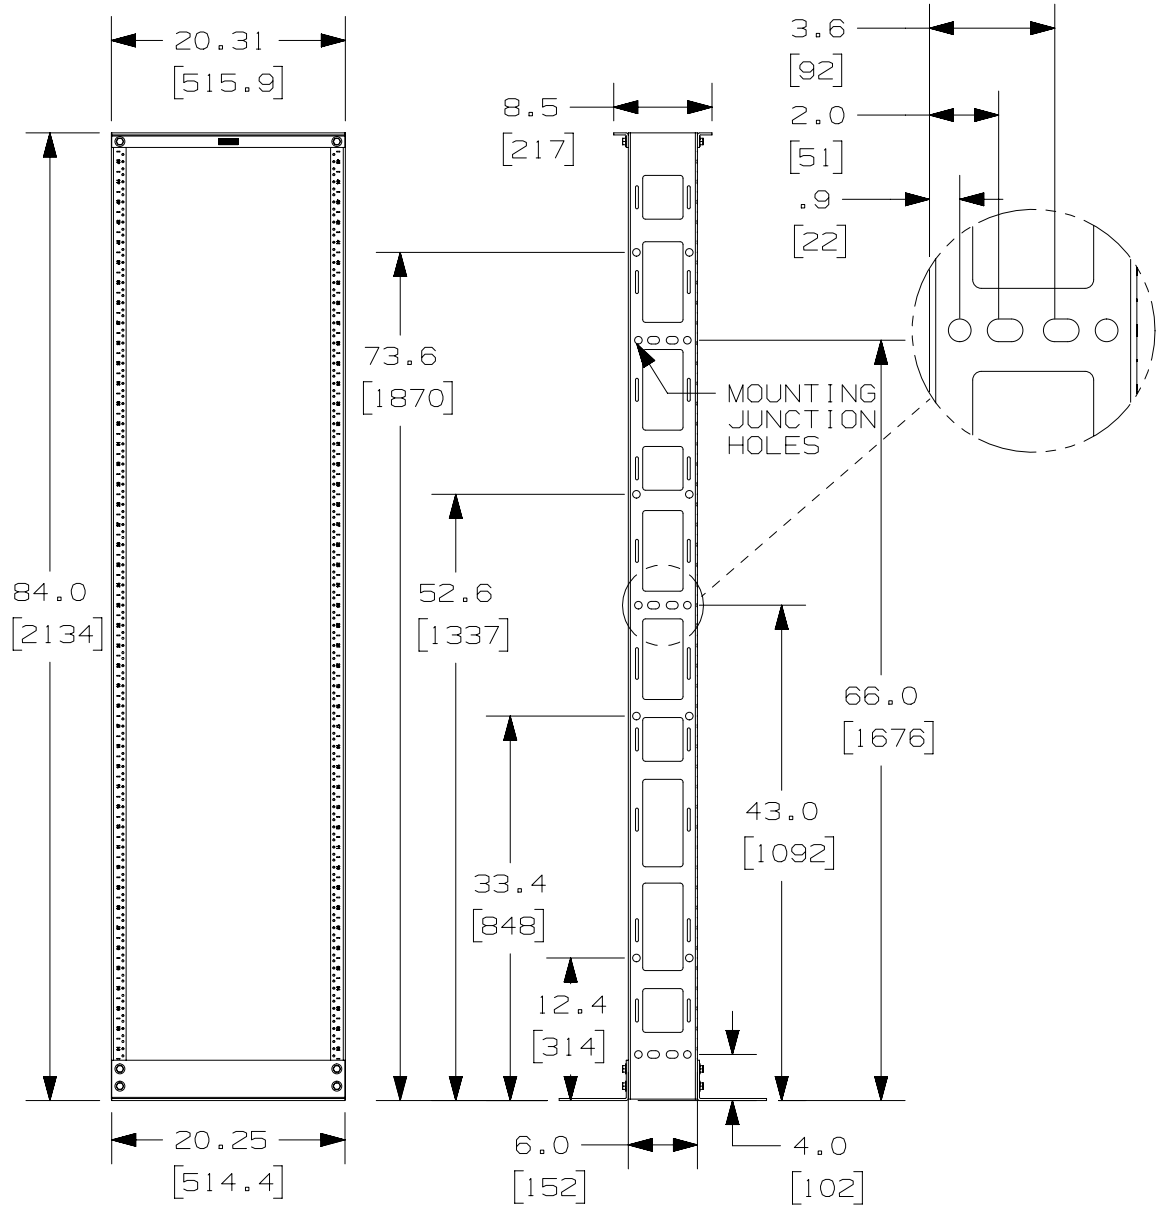

PANDUIT P/N	WEIGHT
R2P6S	57 LBS/EACH 25.9 Kg/EACH

NOTES:
1. CAN BE USED WITH ANY INDUSTRY STANDARD 19" COMPONENT IN ADDITION TO ALL PANDUIT CABLE MANAGEMENT AND PATCH PANEL PRODUCTS.
2. WILL HOLD UP TO 45 SINGLE RACK SPACINGS.
3. CEA HOLE SPACING ON UPRIGHT CHANNELS: .625,.625,.500,.625,.625,.500,ETC.
4. ASSEMBLY IS REQUIRED.
5. RACK PART THICKNESSES:
   - UPRIGHT CHANNELS (11 GA): WEB- .125±.03
     FLANGE .125±.03
   - TOP BRACKET (7 GA): .179±.03
   - BASE BRACKET (7 GA): .179±.03
6. DIMENSIONS IN PARENTHESES ARE METRIC.
7. ALL ASSEMBLY HARDWARE INCLUDED:
   - (12) 3/8-16 X 1" BLACK HEX HEAD CAP SCREW
   - (24) 3/8" PAINT PIERCING GROUNDING WASHER
   - (1) TUBE OF ANTI-OXIDIZING PASTE
   - (12) 3/8-16 BLACK HEX NUT
   - (24) 12-24 X .5" SLOTTED PAN HEAD STEEL SCREW
8. LOAD RATING IS 1500 LBS.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
08A	4-22-16	TWV	BAME	KRKE	UPDATED NOTES	V10459AA-DC
07A	11-25-13	BAME	FGR	CMK	UPDATED VIEWS	V10459AA-DC
06B	4-22-13	RYB		CMK	REDRAWN, NEW TITLE BLOCK	V10459AA_DC

TITLE
7 FOOT CABLE MANAGEMENT RACK
6" DEEP (R2P6S)
CUSTOMER DRAWING

ITEM REVISION NAME: V10459AA/08
DATASET FILE NAME: V10459AA_DC/08A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
.X ± .XXX ±
.XX ± ANGLES ±
THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES
DRAWING NUMBER: V10459AA_DC

DRAWN BY	DATE	CHK	SCALE		SIZE
BAME	3-1-10		NONE	SHT 1 OF 2	A